

## VBC-800PI30-WC

### IR OUTDOOR VARI-FOCAL BULLET CAMERA

Honeywell Vista series VBC-800PI30-WC IR Outdoor Vari-focal Bullet Camera is designed for commercial and residential surveillance, and is suitable for any outdoor applications. The VBC-800PI30-WC features 540TVL resolution, and provides clear video images with 25 to 30m IR visible range, anti-flare double glass and intelligent IR. With IR illumination, VBC-800PI30-WC is ideal for surveillance in dim or even completely dark environments.

Installation is quick and easy. The VBC-800PI30-WC comes fully assembled with wall mount and ceiling mount bracket to provide great installation flexibility. Its IP66 housing provides maximum protection against dust, water and dirt.


#### Market Opportunities

Ever since the advent of small affordable video surveillance systems, protection of property has been a principal prevention against shoplifters. Set up the VBC-800PI30-WC at your surrounding area to capture all the actions by your own security camera. This Vista camera is ideal for medium-scale applications in residential areas commercial buildings, retail stores, offices, warehouses, shopping malls and so on.

#### FEATURES

- 25 – 30m IR visible range
- Anti-flare double glass
- Intelligent IR compensation
- 4 – 9mm vari-focal lens
- 12 VDC input voltage
- IP66
- Wall mount and ceiling mount support

#### DIMENSIONS

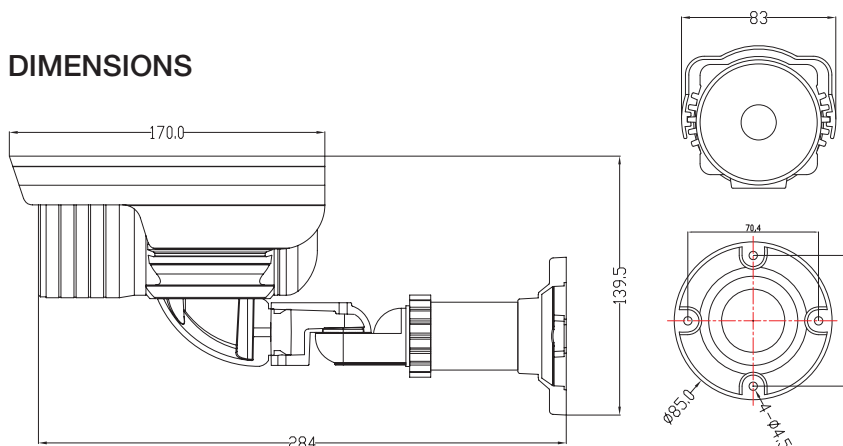

# VBC-800PI30-WC

www.black.honeywell.com

## IR OUTDOOR VARI-FOCAL BULLET CAMERA

### SPECIFICATIONS

Model	VBC-800PI30-WC	VBC-800NI30-WC
Image Sensor	1/3" SONY Super HAD CCD	
Signal System	PAL	NTSC
Effective Pixels	752(H) x 582(V)	768(H) x 494(V)
Horizontal Resolution	Color: 540 TV lines; B/W: 600 TV lines	
Minimum Illumination	0.1 Lux (IR LED OFF) / 0 Lux (IR LED ON)	
IR LED Control	ON: 1 – 3 Lux; OFF: 5 – 6 Lux	
S/N Ratio	More than 50 dB	
AES	1/50 – 1/100,000 sec (PAL)	1/60 – 1/100,000 sec (NTSC)
BLC	Auto	
White Balance	Auto	
AGC	Auto	
Lens	Vari-focal Lens f=4 – 9 mm	
IR LED	850 nm	
IR Beam Distance	25 – 30 m	
Gamma Correction	0.45	
Sync Mode	Internal	
Video Output	1.0 Vp-p, 75 Ohm	
Input Voltage	12 VDC	
Current Consumption	150 mA (IR LED OFF) + 280 mA (IR LED ON)	
Operation Temperature	-10°C ~ 50°C under 90%RH (non-condensing)	
Rating	IP66	
Weight	About 1000g	
Certificate	CE & C-Tick	

### ORDERING

VBC-800PI30-WC (PAL)	IR Outdoor Vari-focal Bullet Camera, 540 TVL, 0 Lux (IR LED ON), Day/Night, 12 VDC, 4-9 mm Vari-focal, IR Beam Distance: 25 - 30m, Wall Mount and Ceiling Mount Support ,PAL/NTSC
VBC-800NI30-WC (NTSC)	

For more information:

Security Hong Kong  
Security Australia National Sales Hotline  
Security India

Tel: (852) 2405 2323  
Tel: 1300 765 532  
Tel: (91) 124 4029800

www.black.honeywell.com  
security.black@honeywell.com

**Honeywell Security Group**  
Automation & Control Solutions  
Honeywell International Inc.  
www.security.honeywell.com

Jul 2011  
© 2011 Honeywell International Inc.

**VISTA**  
**Honeywell**