

GKB ONVIF NC6960 IP Camera




1080P HD IR Waterproof Bullet Network Camera

Features:

- 1080P CMOS Megapixel Sensor
- ONVIF 2.0 Compliance
- 4 video streams
- Waterproof (IP 66)
- 2 way audio
- DI / DO
- ROI
- 3DNR



Dimension (mm)

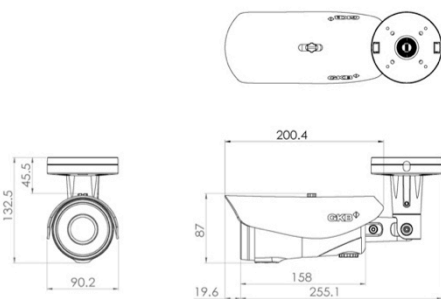

| | | |
|-----------|-------------------------|--|
| Model No. | | GKB NC6960 |
| Video | Resolution | 1080P(1920*1080),VGA,QVGA |
| | Frame Rate | Up to 1080P, 30 fps |
| | Video Compression | H.264/ M-JPEG |
| | Video Streams | 4 |
| Camera | Image Sensor | 1/2.8" 2.4 Megapixel SONY EXMOR CMOS Sensor |
| | Lens | 3.3-12mm Vari-focal Auto Iris ICR Lens |
| | Min. Illumination | 0.01Lux (color mode) |
| | Infrared Distance | 40-50M |
| | Infrared Quantity | High Power 2 pcs |
| | Digital Noise Reduction | 2DNR/3DNR |
| | ROI | Yes |
| | Privacy | Yes, multiple area |
| | Motion | Yes, multiple area |
| | BLC | Yes |
| | Night Mode | Auto |
| | White Balance | AWB |
| | Alarm function | Trigger: Motion detection, GPIN, Network disconnect, IP address conflict Reaction: FTP, E-mail, GPOUT |
| | Shutter Control | 1/30~1/10,000sec , Electronic rolling shutter(ERS) |
| | Scanning System | Progressive |
| | Gamma | 0.45 |
| S/N Ratio | 50dB | |
| General | Power Supply | DC 12V / PoE (IEEE 802.3af) |
| | Power Consumption | MAX7.2W |
| | Audio compression | AAC /G.711A /G.711U/G.726 /GSM-AMR Sample Rate:8KHz Bit Rate:8/16/24/32(Kbps) |
| | Storage | Micro SD Card |
| | DI / DO | Dix1 (12~24VDC) Dox1 (0.5A/125VAC OR 1A/30VDC) DO: Normal Open |
| | Connector | RJ-45 x 1, DC jack x 1, Audio In x 1, Audio Out x 1, DI x 1, DO x 1 |
| | Dimension | 256(L) x 132(W) x 78(θ)mm |
| | Operating Temperature | -10°C ~ 60°C |
| | Weight | 1.2 kg |
| | Networking | Protocol |
| Ethernet | | 10/100Mps Fast Ethernet RJ-45 port |
| Security | | Password, IP filter, Http encryption, IEEE 802.1X, QoS, DSCP |