


AHD Array IR Waterproof Camera

KC-OT200WAHD



FEATURES

- 1/3" 2.0 Megapixel CMOS
- OSD Menu, control over coaxial cable
- Support 25fps@1080P、30fps@1080P、50fps@1080P、60fps@1080P
- High speed, long distance real-time transmission
- Over 500m via 75-3 coaxial cable Transmission
- Full HD and standard definition switch
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- Intelligent IR

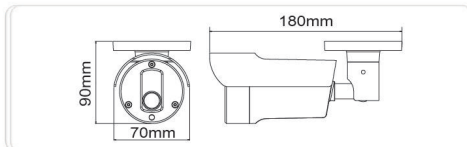

Specification

Model No	KC-OT200WAHD	
Image Sensor	1/3" PO2210K CMOS	
TV System	PAL / NTSC	
Effective Pixels	1920(H) × 1080(V)	
Mini. Illumination	0.01Lux@ (F1.2, AGC ON) , 0 Lux with IR	
Electronic Shutter	1/25s ~ 1/100,000s	
Video standard	AHD standard definition	
Video Frame Rate	1920 × 1080@25 fps ; 1920 × 1080@30 fps ; 1920 × 1080@50 fps ; 1920 × 1080@60 fps ;	
LED & IR Distance	IPCs Array LED Max IR View Distance 30M	
Day&Night	ICR	
Video Output	1-channel BNC AHD high definition video output, can be switch to normal analog output.	
OSD Menu	Support	
Menu control	Exposure	AUTO/BLC
	White balance	AWB
	Day&Night	AUTO/ B/W /COLOR
	function set	3D Noise Reduction
	Advanced Function	D-WDR, Demist function
	Image adjust	sharpness/contrast/ saturation/ lightness
Transmission Distance	Over 500m via 75-3 coaxial cable	
Working Environment	-30° C~+60° C / Less than 95%RH (no condensation)	
Power Supply	DC 12V ± 10%	
Lens	3.6MM/6MM lens	
Operating Temperature	-10°C to +50°C, RH 80% Max	
Storage temperature	-20°C to +60°C, RH 90% Max	
Storage temperature	-20°C to +60°C, RH 90% Max	
Dimension	100(L) × 67(W) × 75(H)mm	
Weight	370g	
Product Box Size	180mm*95mm*100mm	
Carton Size; Qty Of Package	540mm*340mm*400mm; 25PCS/CTN	

<http://www.keeper.cn>